

## DATASHEET



**XTASI-input** is a pocket-sized **MPEG-Transport Stream** input device in robust aluminium housing. The USB-powered modules turn a tablet computer into an economic broadcast measurement system.

**XTASI-input** allows analysis of a broadcast chain with a single device and provides in-depth information on the transmitted content.


**XTASI-input** hardware ships with the **ABC 4T2™ Content-Analyser** application software, the most flexible analysis application on the market.

### interfaces

DVB-ASI Connectors (EN50083-9)	BNC (female) - 75 Ω up to 214 Mbps
USB 2.0	Mini-socket, high speed

### physical and power

Length	100 mm / 3.9 in
Height	16 mm / 0.6 in
Width	42 mm / 1.7 in
Weight	< 110g & 0.24 lbs
Power supply	USB 2.0, self-powered

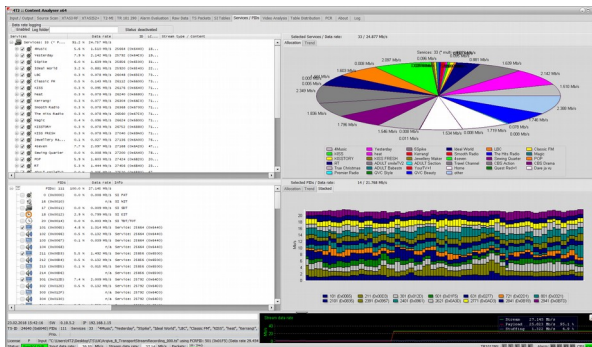

## XTASI-input with 4T2™ Content-Analyser



### fields of use

- Testing of all elements in the broadcast chain
- Transport Stream analysis for R&D labs, test, installation, or demonstration purposes

### benefits

- MPEG-2, and MPEG-4 analysis
- Hardware and Software from one supplier
- Compact, USB-powered device
- XTASI-RF input sister-module available
- stand-alone TS-frame detection
- Optical status indicators

### characteristics

- DVB-ASI input
- Comprehensive analysis features
- Supporting 64bit Windows®
- Multiple devices on a single computer supported

### environmental

Operating temperature	0 ÷ 55°C (32 ÷ 131°F)
Storage temperature	-20 ÷ 70°C (-4 ÷ 158°F)
Humidity	0 to 95%, non condensing

### package contents

- XTASI-input module
- Carrying pouch (130x100x60) mm, 150g
- USB high speed interface cable
- 4T2 Content-Analyser application (download)

Advanced Broadcast Components  
Frankfurterstrasse 21  
64720 Michelstadt, Germany  
www.4T2.eu  
+49 176 618 177 39